
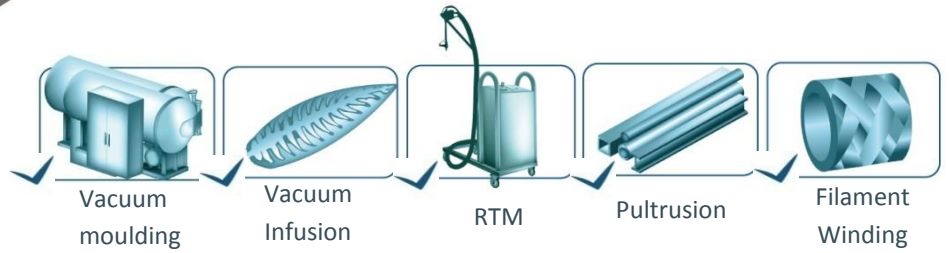


PES90

Economical Polyester Peel Ply

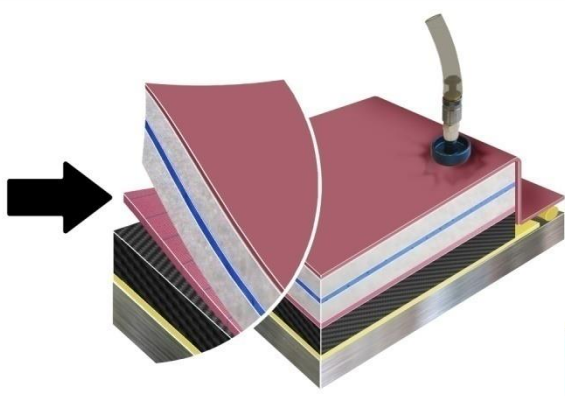

DESCRIPTION

PES 90 is an **economical** high tenacity **standard peel ply** designed to be used with epoxy, phenolic and polyester systems. The high tenacity fabric leaves a rough surface impression for priming and secondary bonding. There is no release agent or silicone in the fabric: **PES 90** is a synthetic fiber which offers a peel ply surface free from contamination. The fabric is scoured and heat set to prevent contamination and shrinkage.

STORAGE

Keep this film at room temperature and normal hygrometry.

CHARACTERISTICS

Raw fabric	Color	Thick.	Weight	Use with Phenolic	Treatment	Max. Serv. Temp.	Packaging
Polyester	White	150 μ	90 g/m ²	Yes	Scoured & Heat Set	210 °C	Roll

Weave	Extractable Materials	Standard Length	Standard Width	Tape	Elasticity		Breaking Strength	
					Warp	Weft	Warp	Weft
Taffeta	< 0,1 %	100 m / 500 m	1,65 m	13 to 1600 mm	25%	27 %	138 daN/5cm	100 daN/5cm

Manufacturer: **DIATEX** (Made in France)

Indice C - Application date october 2012

